

# SPECIFICATION



CR14250E 3.0V



## Electrical characteristics

(Typical values relative to cells stored for one year at +30 °C max)

○ Nominal capacity	650mAh
Discharged capacity at 5mA, +25 °C, 2.0V cut off	
○ Nominal voltage	3.0V
○ Max. recommended continuous current	250mA
Discharged to 2.0V at +25 °C permitting 50% of the nominal capacity to be achieved	
○ Max. Pulse capability	500mA
Current value is obtained 2.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25 °C	
○ Operating temperature rang	-30 °C ~ +60 °C

## STORAGE:


Stored in clean, dry and cool circumstances (the temperature should be 20 degrees or lower, less than 30 degrees)

## WARNING:

Don't charge, crush, disassemble, expose contents to water, heat above 100 °C or may lead to explosion, burn or poison goods leakage. Discarded battery should be buried deeply to the ground.

## Key features

- High and stable operating voltage
- Low self-discharge rate
  - Annual self-discharge rate lower than 2% at +20 °C
- Stainless steel nickel plated
- Glass to metal seal
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

 UL Component Recognition  
File Number MH46165

## Main applications



- Alarms or security equipment
- Smoke detectors
- Memory backup
- Real time clock
- Professional electronic equipment
- Medical equipment

.....

# CR14250E


# 650mAh

## Discharge characteristics at 25°C

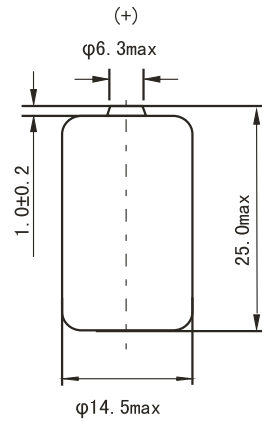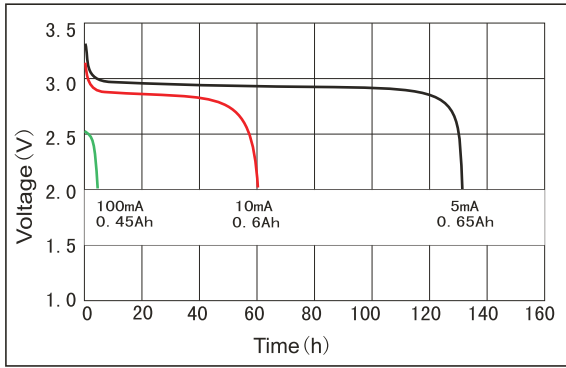


单位: mm  
Dimensions in mm  
Weight: 8.5g

## Voltage vs Current curve

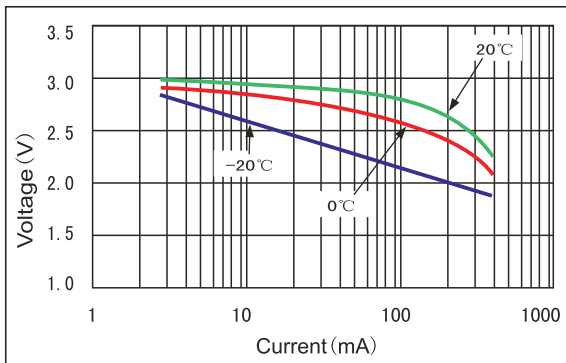


Available Terminations	
-/P*	Axial pin
-/T /PT2*	Radial Pin
-/PT /TP*	Polarized Tab
(*) : Reference to Standard Terminals for Single Cells	

## Capacity vs Current curve

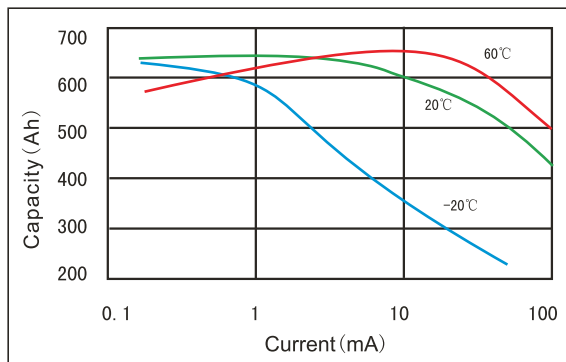

## Discharge characteristics after storage

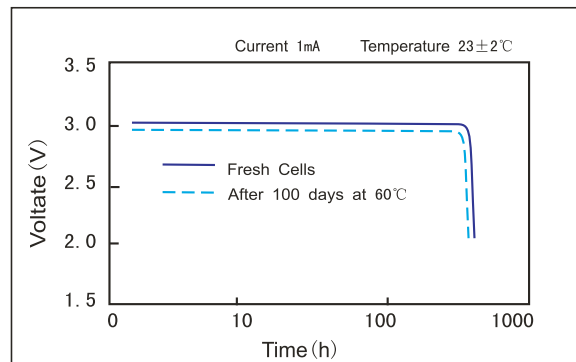

Data in this page is subject to change without notice and becomes contractual only after written confirmation by Fute.

Wuhan Fute Technology CO.,LTD

Address: No.1 Sitai Industrial Park, Yongfeng Avenue, Hanyang District, Wuhan City, China.

Tel: 86-27-84453199, 84452919 Fax: 86-27-84453116 Post Code: 430051

http://www.fansobattery.com E-mail: info@fansobattery.com